

Clarke®

S12 & S16 Single Motor Upright Vacuums



www.clarkeus.com

Clarke®

Cleaning Power Since 1916.

Choose from Five Commercial Upright Vacuums S12, S12PF, S12CC, S16 & S16PF

S12 -

12-inch brush vacuum featuring cloth bag filter that opens at the top

S12PF -

12-inch brush vacuum featuring cloth bag with top-fill paper filter insert

S12CC -


12-inch brush vacuum featuring collector cup with cloth bag filter

S16PF -

16-inch brush vacuum featuring cloth bag with top-fill paper filter insert

S16 -

16-inch brush vacuum featuring cloth bag filter that opens at the top

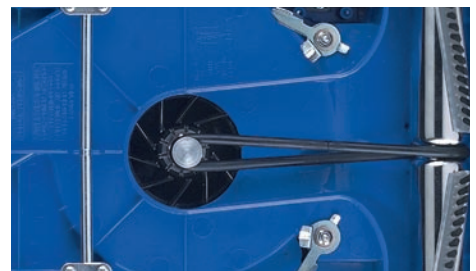

Foot Operated Height Adjustment

Changing brush height is easy and convenient with a right foot-activated, multi-level adjustment lever. Numeric indicator easily identifies height selected.

Foot Lever Release

The left foot-activated handle release provides two positions - midway stop with first pedal touch and full pivot to floor with second pedal touch.

Powerful Vac Motor

Powerful 7 or 9 amp continuous-duty motor delivers air movement at 89 cubic feet per minute. High-impact, shock-resistant composite impeller provides reliability and long motor life.

Soft touch handle grip with finger recess comfort

Handle activated on/off thick gauge metal nickel plate construction

Quick release cord wrap for long 50 ft. power cord

Latest in top-opening bag filtration at up to 1 micron, with 98% efficiency



No-clog bottom entry but with top-fill deposit design advantages

Durable composite housing construction with non-marking bumper

Large 3 inch wheels provide easy transport over thresholds and stairs

Ultra low 2.75" profile allows 3.75" of reach for under counter cleaning access

**S12 & S16
Collector Cup and
Paper Filter Models
are CRI Green
Label Approved.**

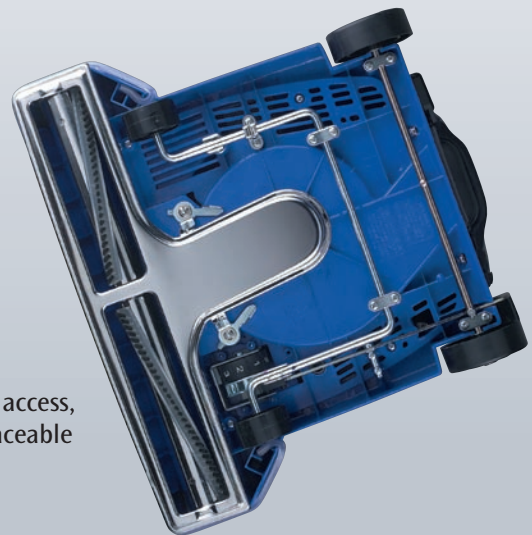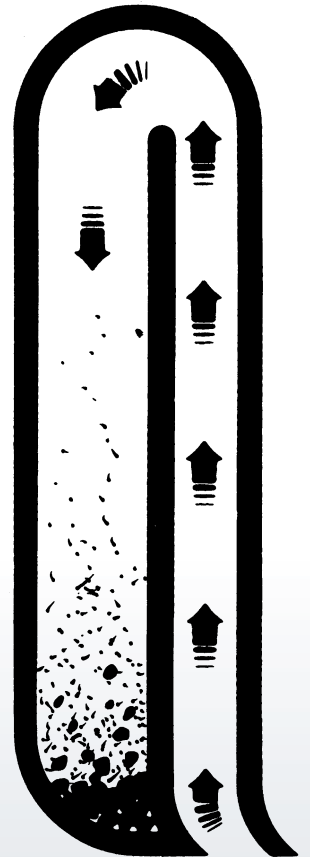

Easy-to-Access Brush and Belts

Belt, brush and impeller offer no-tool access, and chevron style brush features replaceable bristle strips.

S12, S12PF, S12CC, S16 & S16PF

Clarke®



KEY FEATURES

- Three filter types: shake out bag, paper filter (PF), and collector cup (CC)
- Cloth bag or bag with collector cup
- Durable composite construction
- Low profile
- No-tools access to brush and belts

SPECIFICATIONS

	S12	S12PF	S12CC	S16	S16PF
Part Number	03058A	03112A	03082B	03116A	03114A
Motor (amp)	7-continuous duty		7-continuous duty	9-continuous duty	
Machine Operating (amp)	5.5 Amp		5.5 Amp	5.5 Amp	
Air Movement	89 cfm		79 cfm	89 cfm	
Filtration @ 98% efficiency	3 micron	1 micron	3 micron	3 micron	1 micron
Filter Style	Top-open cloth	Paper filter bag	Cloth & dirt collector cup	Top-open cloth	Paper filter bag
Max Sound Level	70 db		70 db	74 db	
Handle Weight @ 31.5"	1.1 lbs.		1.1 lbs.	1.1 lbs.	
Weight w/o Power Cord	15 lbs.		15 lbs.	16 lbs.	
Dimensions (L x W x H)	14" x 13" x 45"		14" x 13" x 45"	14" x 17" x 45"	
Height Profile Over Brush	2.75"		2.75"	2.75"	
CRI Certification	NA	Green Label	Green Label	NA	Green Label
Warranty	1 Year Parts & Labor				

WHO USES THIS MACHINE?

- Public facilities
- Hospitals
- Schools
- Government
- Hospitality industry
- Cleaning contractors

WHAT DOES IT DO BEST?

- Removes soil from textile flooring and rugs for effective daily maintenance

WHAT MAKES IT EASY TO USE?

- Two-position handle with foot-activated release
- Adjustable foot pedal for brush height settings
- Light 1.1 lb. handle at operating height
- Simple, handle-activated on/off switch.
- Quick-release cord wrap clip
- Comfortable soft-touch handle grip

WHAT ENHANCES ITS PRODUCTIVITY?

- Ultra-low profile
- Non-marking, 50 foot swivel power cord
- Powerful 7 or 9-amp continuous-duty motor

WHAT ADDS TO ITS DURABILITY?

- Heavy gauge steel, nickel-plated handle
- High-impact, shock-resistant composite impeller
- Heavy-duty, long-life motor
- Replaceable brush strips
- Rugged composite housing

WHAT ARE ITS SAFETY FEATURES?

- Underwriter Laboratories listed

WHAT ARE ITS OPTIONAL FEATURES?

- Disposable paper filters

Clarke®

2100 Highway 265
Springdale, Arkansas 72764
www.clarkeus.com

Customer Relations 1-800-253-0367
Fax Orders to: 1-800-825-2753
Technical Service: 1-800-356-7274

DISTRIBUTED BY:

