

Clarke®

Propane Powered Burnishers
21 inch and 27 inch sizes



www.clarkeus.com

Clarke®

Cleaning Power Since 1916.

Burnishers Provide Powerful Results, Superb Dust Control


When you need floor equipment to quickly burnish large surface areas to a high gloss, turn to the manufacturer who provides the most power available. Clarke® propane-powered burnishers are available in 21-inch and 27-inch path sizes, so you can choose the best match for your productivity needs. The Dust Control Series also offers superb dust control which is often critical for retail stores, office buildings, educational institutions, supermarkets and sports facilities.



Clean burning 17 hp twin cylinder Kawasaki engines power all Clarke Catalytic muffler and Carb Gard equipped burnishers.



Balanced pad drivers reduce vibration and are flexible to follow the contour of uneven floor surfaces.

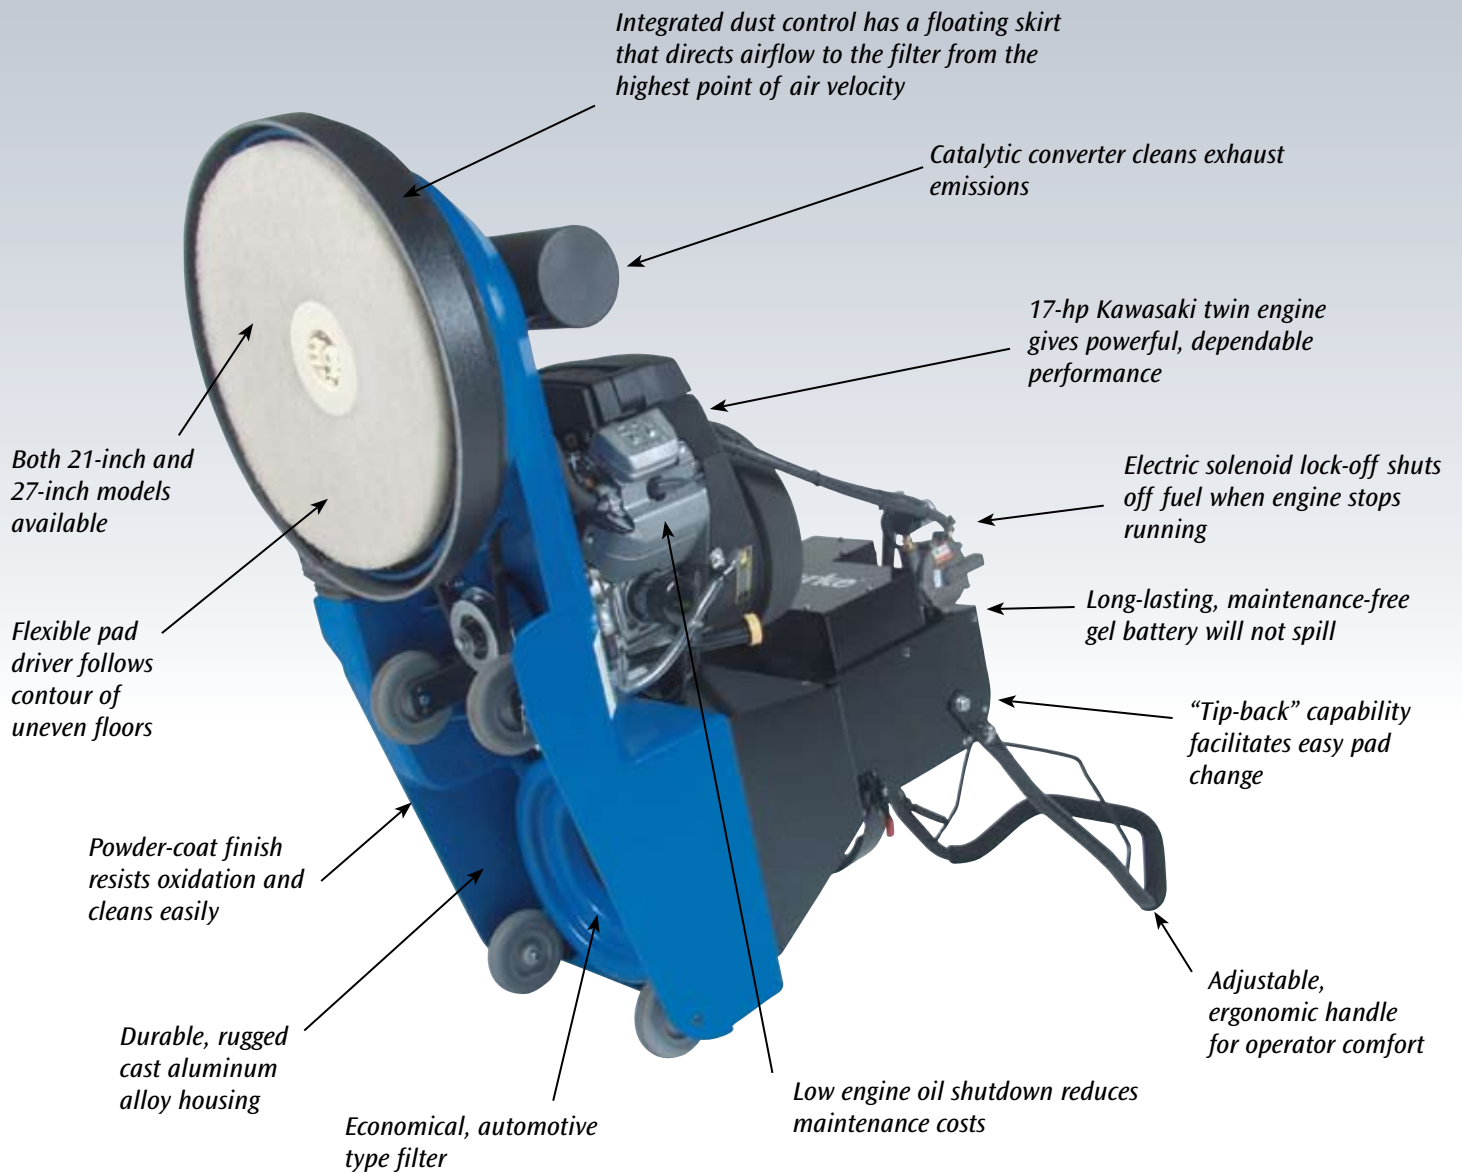

The Dust Control series offers a unique floating shroud that directs the high velocity airflow near the floor to collect six times as much dust as competitive models.

(Patent Pending)




Automotive style air filter for improved indoor air quality. Dust Control system extends pad life by preventing particle build-up in the pad.

(Patent Pending)




Control panel lights inform operator of emissions controls and engine performance. Planned maintenance intervals are easily monitored with the on-board hour meter and the standard key-ignition switch prevents unauthorized use.

Propane-Powered Burnishers



KEY FEATURES

- Sizes and configurations for any application
- Optional features for complete versatility
- Clean and efficient catalytic converter
- Effective dust and emissions control



SPECIFICATIONS

	Contractor Series		Dust & Emissions Control Series	
Burnishing Path Size	21"	27"	21"	27"
Engines	13-hp Kawasaki (Electric or Battery Start) 17-hp Kawasaki (Battery Start)	17-hp Kawasaki (Battery Start)	13-hp Kawasaki (Electric or Battery Start) 17-hp Kawasaki (Battery Start)	17-hp Kawasaki (Battery Start)
Frame/Deck	Cast Aluminum Alloy with Powder Coat Finish			
Low Oil Indicator	Electric Shutdown			
Fuel Lock-Out	Mechanical or Electric			
Flow Check Valve	Available on all models			
Centrifugal Clutch	Available	Available	Standard	
Electric Clutch	Available with catalytic converter		NA	
UL Approved (CUL US - USA & Canada)	On all models with 17-hp Kawasaki and clutch			
EPA & CARB Approved	All models approved			
Hour Meter	Available on all models			
Pad Driver	Harpoon - flexible with back reinforcement			
Carb Gard Emission Control	No		Yes	
Catalytic Converter Models	Yes			
Warranty	2 Year Parts & Labor			

WHO USES THIS MACHINE?

- Retail stores
- Office buildings
- Educational institutions
- Supermarkets
- Sports facilities

WHAT ENHANCES ITS PRODUCTIVITY?

- Powerful engine maintains speed under heavy loads
- Flexible pad driver follows contour of uneven floors
- Large 20-pound (9-kg) propane tank offers long working time between refills
- Effective dust control eliminates dust on merchandise, reduces pad build-up

WHAT DOES IT DO BEST?

- Accomplishes high-gloss burnishing with the most power available
- Completes large areas fast for high productivity
- Reduces operator fatigue with ergonomic comfort
- Easy to maintain

WHAT ADDS TO ITS DURABILITY?

- Rugged cast aluminum alloy housing
- Powder-coat finish
- Harpoon face pad driver reduces pad expansion which increases pad life
- Long-lasting, maintenance-free gel battery

- 80% safety fill tank prevents overfilling and subsequent damage to propane components
- Low engine oil shutdown

WHAT ARE ITS OPTIONAL FEATURES?

- 80% safety fill, polished a tank
- Carbon monoxide monitor
- Tank storage cages

WHAT ARE ITS SAFETY FEATURES?

- Catalytic converter for clean air exhaust
- "Carb Gard" emissions monitor
- 80% safety fill tanks prevent overfilling
- Safety certification program

Clarke®

2100 Hwy. 265
Springdale, AR 72764

www.clarkeus.com

DISTRIBUTED BY:

Customer Relations: 1.800.253.0367
Fax Orders to: 1.800.825.2753
Technical Service: 1.800.356.7274

©2005 ALTO U.S. Inc., All Rights Reserved. Specifications subject to change without notice. P/N 79747A Rev. 12/05

